



Light Gauge Metal (20-25)

Product #210

Scavenger Head Fastener



Scavenger



Streaker



#2 Phillips

Fine thread self tapping screws for attaching drywall to light gauge steel

Finish - Black/Gray Phosphate

Applications

- 1/2" to 5/8" single-layer gypsum board to 20 – 25 gauge steel studs and runners
- 1/2" and 5/8" double-layer gypsum boards to 20 – 25 gauge steel studs, runners, furring, and Z furring channels
- 1" coreboard to metal angle runners in solid partition

Specifications

- Gauge – #6
- Lengths – 1" to 1-5/8"
- Head Type – SCAVENGER
- Recess Type – #2 Phillips
- Thread Type – Double Lead
- Finish – Gray Phosphate
- GRABBER screws are manufactured in an ISO 9002 and ISO 14001 certified and approved factory, and are approved by ICBO ES ER #5280.

Product Features

- Unique head configuration helps eliminate paper burrs and aids proper seating of fasteners
- A fine thread screw for general interior applications
- 15 threads per inch
- Super sharp, 23° STREAKER™ point, designed to penetrate steel quickly and easily
- #2 Phillips recess drive

Installation Guidelines

- Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance – 4 amps minimum and RPM range of 0 to 4,000.
- The SCAVENGER head is fully seated when the head is flush with the work surface.
- Overdriving may result in failure of fastener or strip out of the work surface.
- The fastener must penetrate beyond the metal three full thread pitches.

Light Gauge Metal (20-25)

Product #210

Scavenger Head Fastener

Product Sizes and Ordering Information

Catalog No.	Gauge/Length	Length Metric	Quantity per Carton*	Weight Per Carton
168S	#6x1"	25 mm	10 M	28.00(lbs)
368S	#6x1-1/4"	32 mm	8 M	30.00(lbs)
268S	#6x1-1/8"	28 mm	10 M	32.00(lbs)
468S	#6x1-5/8"	41 mm	5 M	22.00(lbs)

*1lb Box and 5lb Box screw packaging option available on selected items.

Pull-out and Shear Test Data**

Screw Gauge	Metal Gauge	Tension (lbs.)	Shear (lbs.)
#6	20	237	557
	25	139	278



**GRABBER fasteners are not categorized as structural bolts. The figures listed above are ultimate average values achieved under independent laboratory conditions, and apply to GRABBER Line fasteners only. An appropriate safety factor must be determined by a qualified professional for design purposes.

Standard Corrosion Test Results

Finish	Test	Standard/Protocol	Results
Black/Gray Phosphate	Salt Spray Results	ASTM B117	24 hours, no red rust

Product Dimensions (millimeters)

Gauge	B Head Dia	Recess Depth	W Gauging Width	d Shank Dia	d1 Minor Dia	d2 Major Dia	TPI
#6	8.00	0.50	#2	2.68	2.27	3.45	15
	8.50	0.80		2.72	2.42	3.58	

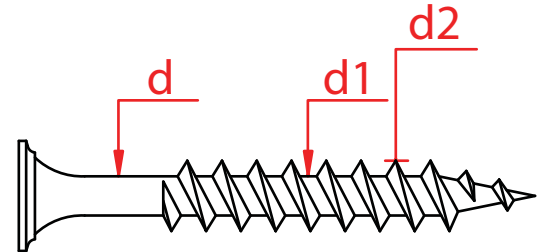


Sheet Steel Gauges

Gauge No.	Decimal Equivalent	Millimeter Equivalent
20	0.0396"	1 mm
25	0.0188"	.6 mm



All GRABBER® screw products are manufactured in facilities that are ISO 9002 and ISO 1401 certified and approved. The fasteners comply with SAE J78 and ASTM C1002 or C954, as referenced in ICBO report ER-5280, and are approved for use by the Uniform Building Code. ©2008 John Wagner Associates, Inc. GRABBER®, STREAKER®, DRIVALL®, LOX®, GRABBERGARD® and SCAVENGER® are registered names or trademarks by John Wagner Associates, Inc.,

Distributed by:



205 Mason Circle
Concord, CA 94520
1.800.477.TURN