
GRABBER

Interior Wood

Product #2301

Bugle Head GRABBER - Interior







Bugle



Grabber



#2 Phillips

Self tapping fasteners for attaching wood or drywall to wood

Finish - Black/Gray Phosphate, Yellow Zinc and Clear Zinc

Applications

- 3/8", 1/2", and 5/8" single-layer gypsum board to wood studs and joists
- 1/2" and 5/8" double-layer gypsum board to wood studs and joists
- Insulation to wood
- OSB or plywood to wood
- Wood to wood applications

Product Features

- Superior holding power and ease of penetration
- A coarse thread screw for general interior applications
- 8 threads per inch
- Extra sharp, single lead 23° GRABBER point, designed to penetrate quickly and easily
- #2 Phillips recess drive

Specifications

- Gauge – #6 to #10
- Lengths – 1" to 4"
- Head Type – Bugle
- Recess Type – #2 Phillips
- Thread Type – Single Lead
- Finish – Gray Phosphate. Also available in Yellow Zinc and GrabberGardTM
- GRABBER screws are manufactured in an ISO 9002 and ISO 14001 certified and approved factory, and are approved by ICBO ES ER #5280.

Installation Guidelines

- Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance – 4 amps minimum and 2500 RPM.
- The Bugle head is fully seated when the head is flush with the work surface.
- Overdriving may result in failure of the fastener or stripout of the work surface.
- For wood to wood connections, minimum penetration should be 7 diameters (e.g. 1-1/4" for #8 fastener)

Interior Wood

Product #2301

Bugle Head GRABBER - Interior

Product Sizes and Ordering Information

Catalog No.	Gauge/Length	Length Metric	Quantity per Carton*	Weight Per Carton
100YZ	#6x1"	25 mm	10 M	30.00(lbs)
100Z	#6x1"	25 mm	10 M	29.00(lbs)
100	#6x1"	25 mm	10 M	29.00(lbs)
300	#6x1-1/4"	32 mm	8 M	30.00(lbs)
300YZ	#6x1-1/4"	32 mm	8 M	33.00(lbs)
300Z	#6x1-1/4"	32 mm	8 M	33.00(lbs)
200Z	#6x1-1/8"	28 mm	10 M	32.00(lbs)
200	#6x1-1/8"	28 mm	10 M	30.00(lbs)
400YZ	#6x1-5/8"	41 mm	5 M	22.00(lbs)
400Z	#6x1-5/8"	41 mm	5 M	22.00(lbs)
400	#6x1-5/8"	41 mm	5 M	22.00(lbs)
500YZ	#7x2"	51 mm	3.5 M	22.00(lbs)
500Z	#7x2"	51 mm	3.5 M	21.00(lbs)
500	#7x2"	51 mm	3.5 M	21.00(lbs)
600	#7x2-1/4"	57 mm	3 M	20.00(lbs)
600Z	#7x2-1/4"	57 mm	3 M	20.00(lbs)
900	#8x2-1/2"	63 mm	2.5 M	19.00(lbs)
900YZ	#8x2-1/2"	63 mm	2.5 M	25.00(lbs)
900Z	#8x2-1/2"	63 mm	2.5 M	25.00(lbs)
1100YZ	#8x3"	76 mm	2 M	22.00(lbs)
1100Z	#8x3"	76 mm	2 M	22.00(lbs)
1100	#8x3"	76 mm	2 M	21.00(lbs)
1200	#10x3-1/2"	89 mm	1 M	17.00(lbs)
1300	#10x4"	102 mm	1 M	20.00(lbs)
1300Z	#10x4"	102 mm	1 M	20.00(lbs)


*1lb Box, 5lb Box and Collated screw packaging option available on selected items.


Standard Corrosion Test Results

Finish	Test	Standard/Protocol	Results
Black/Gray Phosphate	Salt Spray Results	ASTM B117	24 hours, no red rust
Yellow Zinc	Salt Spray Results	ASTM B117	48 hours, no red rust
Clear Zinc	Salt Spray Results	ASTM B117	24 hours, no red rust

Product Dimensions (millimeters)

Gauge	B Head Dia	Recess Depth	W Gauging Width	d Shank Dia	d1 Minor Dia	d2 Major Dia	TPI
#6	8.00	0.50	#2	2.68	2.25	3.75	8
	8.50	0.80		2.72	2.45	3.95	
#7	8.00	0.50	#2	2.93	2.50	4.05	8
	8.50	0.80		2.97	2.80	4.30	
#8	8.00	0.50	#2	3.18	2.80	4.30	8
	8.50	0.80		3.22	3.10	4.60	
#10	8.50	0.50	#2	3.78	3.20	5.00	8
	8.90	0.80		3.82	3.50	5.30	

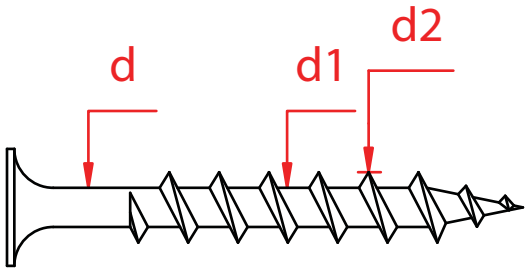



ICBO-ES APPROVED ER-5280

ISO 14001 SGS GREEN DOVE AWARD

ISO 9002 CERTIFIED

All GRABBER screw products are manufactured in facilities that are ISO 9002 and ISO 1401 certified and approved. The fasteners comply with SAE J78 and ASTM C1002, as referenced in ICBO report ER-5280, and are approved for use by the Uniform Building Code. ©2008 John Wagner Associates, Inc. GRABBER®, STREAKER®, DRIVALL®, LOX®, GRABBERGARD® and SCAVENGER® are registered names or trademarks by John Wagner Associates, Inc., dba Grabber Construction Products.

Distributed by:

GRABBER

205 Mason Circle
Concord, CA 94520
1.800.477.TURN